



MARK	CONTENT OF AMENDMENT	DATE	DRAW

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets propriety to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.
COPY RIGHT © 2021 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

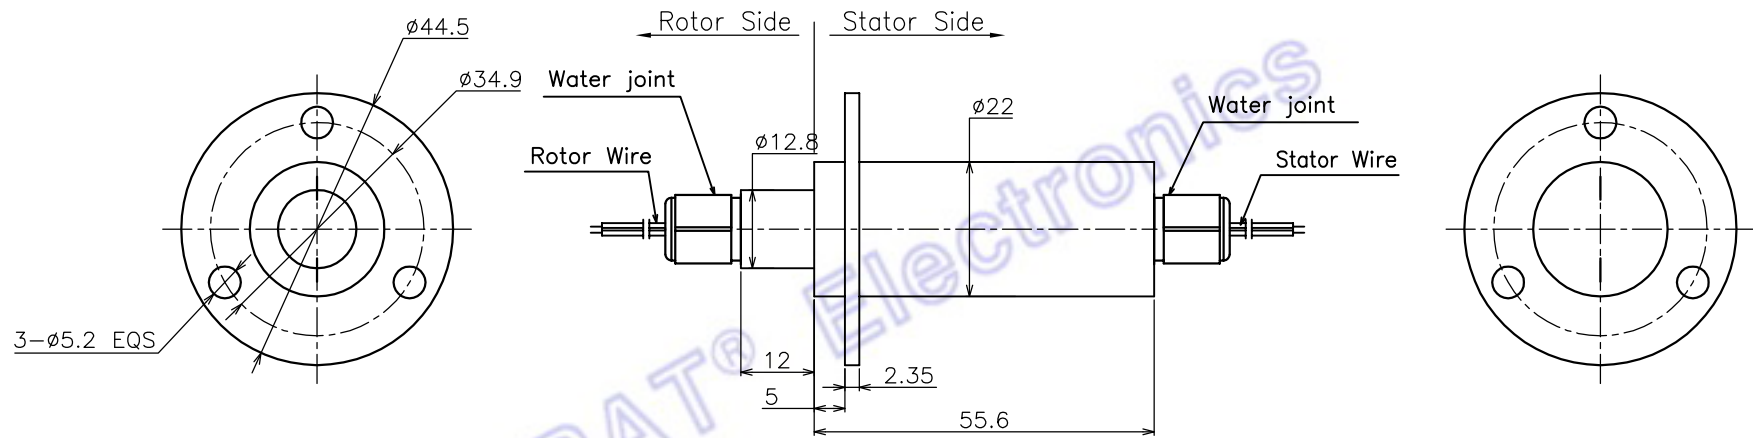


Technical requirements:
1. For the dimension which unmarked tolerance, its tolerance will be controlled according to the unmarked tolerance in the frame


JINPAT
www.slipring.cn

MODEL	LPC-0106-IP68						
Customer code	JP09-047-01		TITLE	Outline Drawing			
UNIT	mm	TOL UNLESS SPECIFIED LINEAR 0--18 ±0.1 >18--80 ±0.15 >80--250 ±0.2 ANGLE x° ±0.5°	DESIGN	LQQ	DATE	2021.03.04	
SCALE	1:1		CHECKED	HZ	DATE	2021.03.04	
PROJ.			REV.	A0	PAGE	1/2	


MARK	CONTENT OF AMENDMENT	DATE	DRAW

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets propriety to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.
COPY RIGHT © 2021 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

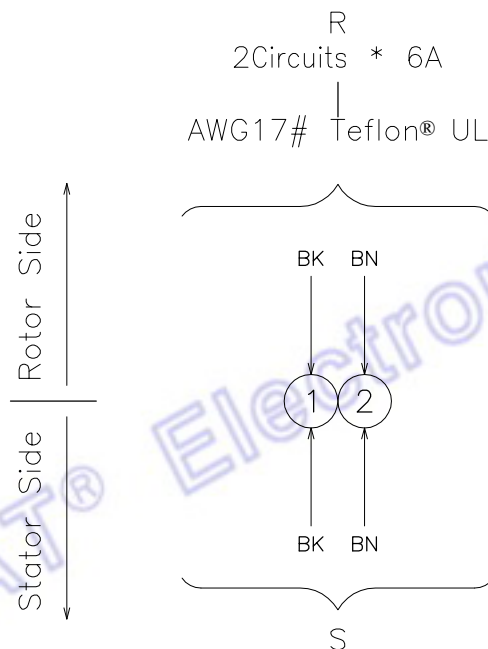

Electronic & Electric			Mechanical	
Circuits	Total	2 CKT	Working Speed	0~100rpm
	Detail	2x6A	Contact Material	Gold to Gold
Rating Voltage		240V AC/DC	Housing Material	Aluminum Alloy
Dielectric Strength		≥500VAC@50Hz	Lead Wire Length	Stator:250±5mm Rotor:250±5mm
Insulation Resistance		≥100MQ@500VDC		
Environment			Remarks	
Working Temperature		-20°C~+60°C	Application	/
Working Humidity		≤60%RH	Other	/
IP		IP68	Note: "P" stands for power, "S" stands for signal.	


JINPAT
www.slipring.cn

MODEL	LPC-0106-IP68						
Customer code	JP09-047-01		TITLE	Wiring Diagram			
UNIT	mm	TOL UNLESS SPECIFIED LINEAR 0--18 ±0.1 >18--80 ±0.15 >80--250 ±0.2 ANGLE x° ±0.5°	DESIGN	LQQ	DATE	2021.03.04	
SCALE	1:1		CHECKED	HZ	DATE	2021.03.04	
PROJ.			REV.	A0	PAGE	2/2	