

## ◎ SPT030-088

### Features

- ◎ Outer diameter: 85 mm
- ◎ Interchangeable brushblock
- ◎ Inspection window



### Typical Applications


- Beverage Filling System
- Food Processing
- Packaging Machine

---

### Data

Number of rings:	4 / 6 / 8 / 10
Current per ring:	Max. 25 A
Voltage:	Max. 380 V
Dielectric strength:	1000VAC@50Hz
Insulation resistance:	≥1000MΩ@500VDC
Rotation speed:	Max. 1500 rpm
Protection class:	IP00 (IP51 with protective cover)
Temperature:	-20 °C ~ +80 °C
Hollow shaft:	Max. Ø 30
Housing material:	Engineering Plastics

## Design Example

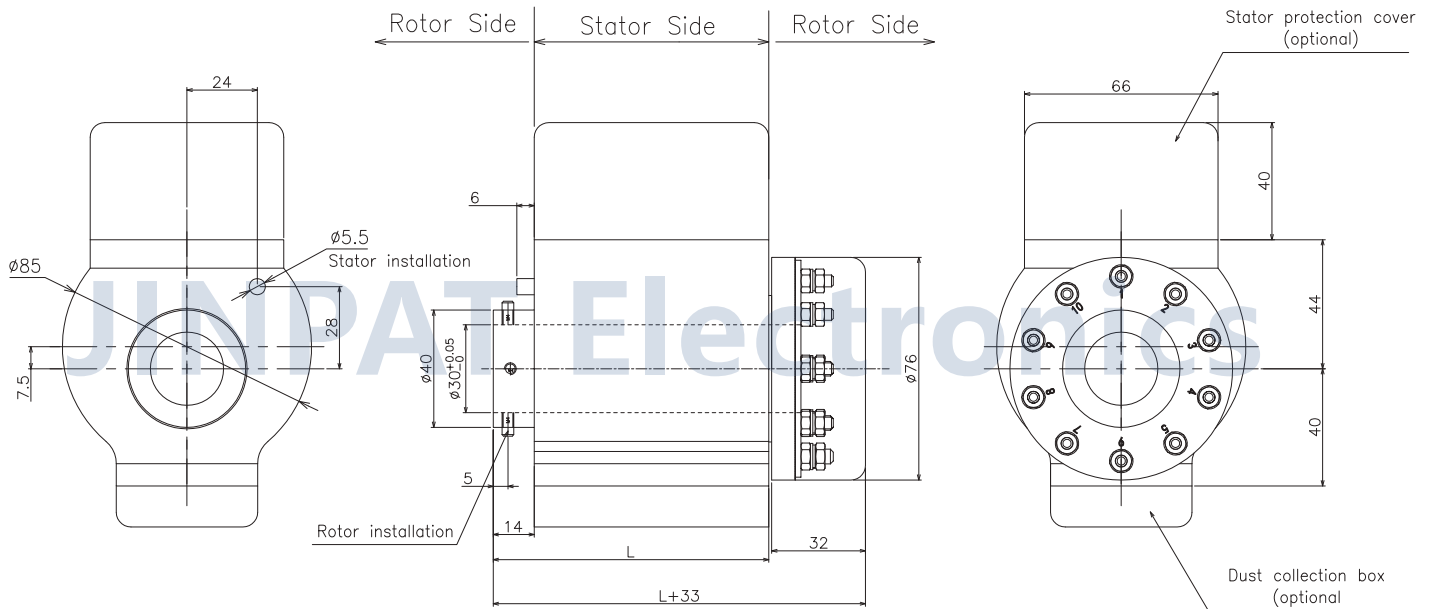

Number of rings	4	6	8	10
L* (mm)	76	94	112	130

### Notes:

This outline drawing is only used for communication and cannot be used for physical production according to this drawing

## Order information

- Number of rings: 4 / 6 / 8 / 10
- Operating current
- Operating voltage
- Options: must be ordered separately and will be enclosed with the delivery

## Options

- Positioning-Disc
- Dust box
- Stator protection cap  
(with cable gland or connector on request)
- All options must be ordered separately and will be enclosed with the delivery

JINPAT Electronics CO. LTD  
No.496 Huarong Road, Dalang St.,  
Longhua District, Shenzhen, 518109, China.  
Tel: +86-755-8204 2235  
Email: sales@slipring.cn  
www.slipring.cn