

◎ SPT050-100



Pictures are for reference only

Features

- ◎ Outer diameter: max. 100 mm
- ◎ Fast Ethernet (certified to 100-BaseT CAT5e & Cat6)
- ◎ Durable design for industrial environments


Typical Applications

- Machine Tool
- Packaging Machine
- Wind Turbine Pitch System

Data

Number of rings: 4/6/12/18 max. 24
 circuits: max. 16 A (P) / max. 3 A (S)
 Voltage: 400VAC (P) / 240VAC/DC (S)
 Dielectric strength: 500 VAC @ 50 Hz
 Insulation resistance: $\geq 1000M\Omega @ 500VDC$
 Rotation speed: max. 120 rpm
 Protection class: IP 54
 Temperature: -20 °C ~ +80 °C
 Wire Length: Rotor/Stator: 1000 mm
 Housing material: Aluminium
 Note: "p" stands for power, "S" stands for signal.

Design Example

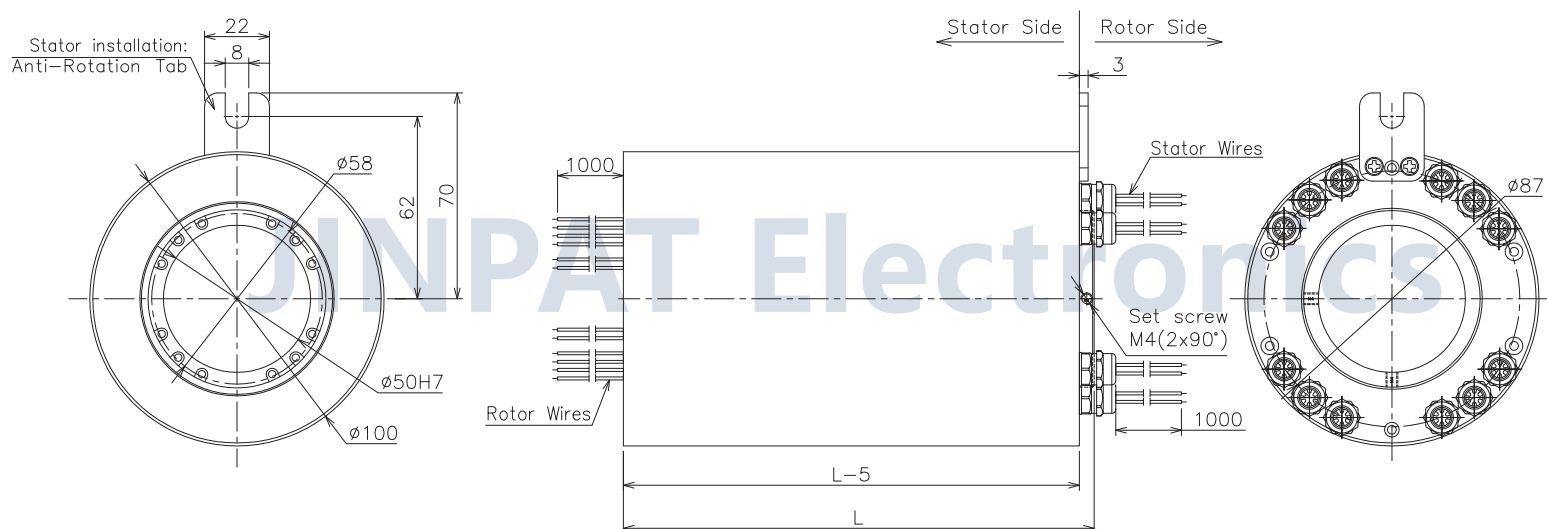

Number of rings	4	6	12	18	24
Power(L*)	84.8	119.8	159.8	/	/